GRT Enterprises - 17 Old Wood Main
GRT Enterprises - 17 Old Wood Main

Quote #: EGCSHJL

A Proposal for Window and Door Products prepared for:
Job Site:
07628

Shipping Address:
KUIKEN BROTHERS COMPANY-NEWARK
500 Doremus Ave
Newark, NJ 07105-4805

KUIKEN BROTHERS
COMPANY, INCORPORATED
RESIDENTIAL & COMMERCIAL BUILDING MATERIALS
Since 1912

MICHAEL MEYERS
KUIKEN BROTHERS COMPANY-NEWARK
PO BOX 1040
FAIR LAWN, NJ 07410-8040
Phone: (201) 262-6666

Email: mmeyers@kuikenbrothers.com

This report was generated on 6/8/2026 12:04:51 PM using the Marvin Order Management System, version 0004.21.00 (Current). Price in USD. Unit availability and price are subject to change. Dealer terms and conditions may apply.

Featuring products from:


MARVIN

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1 Qty: 1	Mark Unit: Basement - Left Side	Net Price: Ext. Net Price:	 USD	1,055.33 1,055.33

MARVIN




As Viewed From The Exterior

FS 18" X 60"
IO 18 3/8" X 60 1/4"
Egress Information
Width: 9 15/64" Height: 55 19/32"
Net Clear Opening: 3.57 SqFt


Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Right Hand
Frame Size 18" X 60"
Inside Opening 18 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 1W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #2 Qty: 1	Mark Unit: Basement - Left Side	Net Price: Ext. Net Price:	 USD	4,508.18 4,508.18

MARVIN



Active




As Viewed From The Exterior

FS 29 1/2" X 80 7/16"
RO 30 1/2" X 80 15/16"
Egress Information
Width: 24 1/8" Height: 76 13/16"
Net Clear Opening: 12.87 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - X Left Hand
Frame Size 29 1/2" X 80 7/16"
Rough Opening 30 1/2" X 80 15/16"
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
*****Note: Unit Availability and Price is Subject to Change**

Line #3 Qty: 1	Mark Unit: Basement - Front	Net Price: Ext. Net Price:	USD	1,837.54 1,837.54

MARVIN

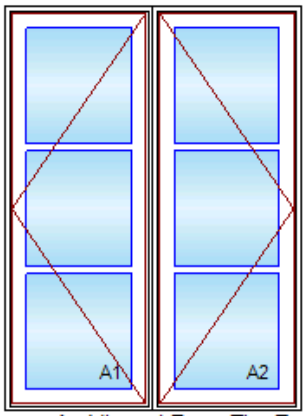

As Viewed From The Exterior

FS 36" X 48"
IO 36 3/8" X 48 1/4"
Egress Information A1, A2
Width: 9 15/64" Height: 43 19/32"
Net Clear Opening: 2.80 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
36" X 48"
Assembly Inside Opening
36 3/8" X 48 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 18" X 48"
Inside Opening 18 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 1W3H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 18" X 48"
Inside Opening 18 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 1W3H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**


Line #4 Qty: 1	Mark Unit: 1st FL - Living Room/Piano	Net Price: Ext. Net Price:	USD	14,272.63 14,272.63

MARVIN

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
2W2H - Shape by Units Assembly
Assembly Frame Size
120 1/4" X 120 1/4"
Assembly Rough Opening

For product warranty information please visit, www.marvin.com/support/warranty

GRT Enterprises - 17 Old Wood Main

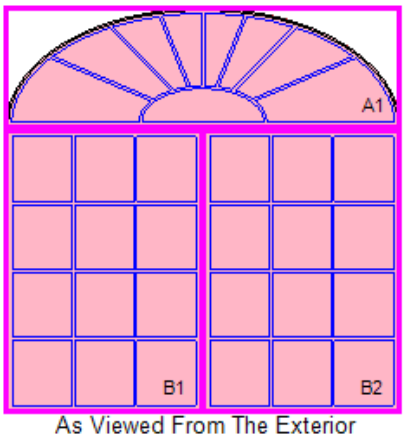

As Viewed From The Exterior

FS 120 1/4" X 120 1/4"
RO 121 1/4" X 120 3/4"
Egress Information A1, B1, B2
No Egress Information available.

121 1/4" X 120 3/4"
Error: Assembly exceeds size limitation. To confirm availability, alternative solutions, or pricing, submit an assistance request or speak with a Marvin representative.
Prep for Field Mull Assembly
Mull Kit(s) Included
Sub Assembly 1 - 1W1H
Basic Frame 120 1/4" x 35 1/4"
Unit Locations: A1
Sub Assembly 2 - 1W1H
Basic Frame 59 15/16" x 84"
Unit Locations: B1
Sub Assembly 3 - 1W1H
Basic Frame 59 15/16" x 84"
Unit Locations: B2

Unit: A1
Ultimate Direct Glaze Round Top - RT29
Basic Frame 120 1/4" X 35 1/4"
Unit Is Not WDMA Certified
Rough Opening 121 1/4" X 35 3/4"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst
9 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int
Due to the inherent qualities of tempered glass, daylight gaps may be seen when using simulated divided lite bars. Daylight gaps could be visible between the internal spacer bar and surface applied bars when viewing from an acute angle to the glass.


Unit: B1
Ultimate Direct Glaze Rectangle
Basic Frame 59 15/16" X 84"
Rough Opening 60 15/16" X 84 1/2"
IG
1/4" Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 3W4H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile

Unit: B2
Ultimate Direct Glaze Rectangle
Basic Frame 59 15/16" X 84"
Rough Opening 60 15/16" X 84 1/2"
IG
1/4" Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 3W4H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Horizontal Structural Mull 1"
Mull 2 - Prep for Horizontal Structural Mull 1" - 120 1/4" Long
Vertical Mull Reinforcement 3/8"
Mull 1 - Prep for Vertical Mull Reinforcement 3/8" - 84" Long
Standard Mull Charge
4 9/16" Jambs
No Installation Method
***Note: The minimum hub width is 12". This may affect the availability or appearance of this unit. Please contact your Marvin Representative for assistance.
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Non-Certified mull: check with local code officials for project specific requirements.
***Note: UDG RT frames use different components than UDG RECT frames that cause the frame to daylight conversion to be different.

*****Note: Unit Availability and Price is Subject to Change**
***Error: Pricing is not Valid

Line #5 Qty: 3	Mark Unit: 1st FL - Robert's Office	Net Price: Ext. Net Price:	USD	10,984.11 32,952.33

MARVIN

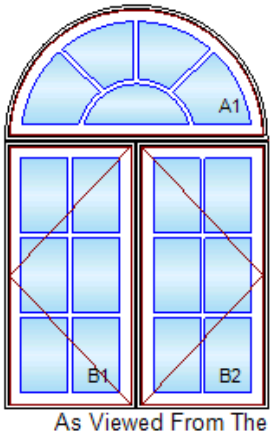

As Viewed From The Exterior

FS 48" X 72"
RO 49" X 72 1/2"
Egress Information A1
No Egress Information available.
Egress Information B1, B2
Width: 16 45/64" Height: 42 33/64"
Net Clear Opening: 4.93 SqFt

Pebble Gray Clad Exterior
Bare Cherry Interior
2W2H - Shape by Units Assembly
Assembly Frame Size
48" X 72"
Assembly Rough Opening
49" X 72 1/2"

Unit: A1
Ultimate Casement Narrow Frame Stationary Round Top - RT1
Basic Frame 48" X 24"
Rough Opening 49" X 24 1/2"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst
5 Radius Lites
Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Ogee Interior Glazing Profile
Standard Bottom Rail
Solid Wood Covers


Unit: B1
Ultimate Casement Narrow Frame - Left Hand
Basic Frame 23 13/16" X 47 5/8"
Rough Opening 24 13/16" X 48 1/8"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W3H
Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Brass Folding Handle
Brass Multi - Point Lock
Interior Wood Screen
Bright View Mesh
Bare Cherry
Ogee Interior Screen Profile

Unit: B2
Ultimate Casement Narrow Frame - Right Hand
Basic Frame 23 13/16" X 47 5/8"
Rough Opening 24 13/16" X 48 1/8"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W3H

Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Brass Folding Handle
Brass Multi - Point Lock
Interior Wood Screen
Bright View Mesh
Bare Cherry
Ogee Interior Screen Profile
Horizontal Mull Reinforcement 3/8"
Vertical Mull Reinforcement 3/8"
Standard Mull Charge
2 3/16" Jambs
Jamb Depth has been changed to 2 3/16". Apply Jamb Extension now if needed.
Installed Installation Brackets
***Note: The minimum hub width is 12". This may affect the availability or appearance of this unit. Please contact your Marvin Representative for assistance.
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
*****Note: Unit Availability and Price is Subject to Change**

Line #6 Qty: 1	Mark Unit: 1st FL - Robert's Office	Net Price: Ext. Net Price:	 USD	12,806.54 12,806.54

MARVIN

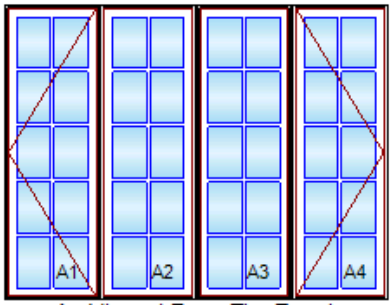

As Viewed From The Exterior

FS 96" X 72"
RO 97" X 72 1/2"
Egress Information A1, A4
Width: 16 39/64" Height: 66 57/64"
Net Clear Opening: 7.71 SqFt
Egress Information A2, A3
No Egress Information available.

Pebble Gray Clad Exterior
Bare Cherry Interior
4W1H - Rectangle Assembly
Assembly Frame Size
96" X 72"
Assembly Rough Opening
97" X 72 1/2"

Unit: A1
Ultimate Casement Narrow Frame - Left Hand
Basic Frame 23 23/32" X 72"
Rough Opening 24 23/32" X 72 1/2"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Brass Folding Handle
Brass Multi - Point Lock
Interior Wood Screen
Bright View Mesh
Bare Cherry
Ogee Interior Screen Profile

Unit: A2
Ultimate Casement Narrow Frame - Stationary
Basic Frame 23 23/32" X 72"
Rough Opening 24 23/32" X 72 1/2"
0 Degree Frame Bevel

GRT Enterprises - 17 Old Wood Main

Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail

Unit: A3
Ultimate Casement Narrow Frame - Stationary
Basic Frame 23 23/32" X 72"
Rough Opening 24 23/32" X 72 1/2"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail

Unit: A4
Ultimate Casement Narrow Frame - Right Hand
Basic Frame 23 23/32" X 72"
Rough Opening 24 23/32" X 72 1/2"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Bare Cherry Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Bare Cherry Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Brass Folding Handle
Brass Multi - Point Lock
Interior Wood Screen
Bright View Mesh
Bare Cherry
Ogee Interior Screen Profile
Vertical Mull Reinforcement 3/8"
Standard Mull Charge
6 9/16" Jambs
No Installation Method
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
*****Note: Unit Availability and Price is Subject to Change**


Line #7 Qty: 1	Mark Unit: 1st FL - Addition Access	Net Price: Ext. Net Price:	 USD	17,351.07 17,351.07

Pebble Gray Clad Exterior

For product warranty information please visit, www.marvin.com/support/warranty

GRT Enterprises - 17 Old Wood Main

MARVIN

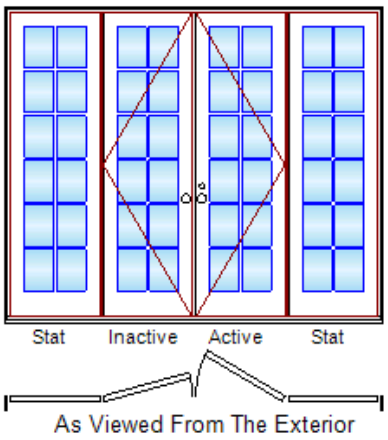

As Viewed From The Exterior


FS 117" X 95 7/16"
RO 118" X 95 15/16"
Egress Information
Width: 52 3/16" Height: 91 13/16"
Net Clear Opening: 33.28 SqFt

Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - OXXO Right Hand
Frame Size 117" X 95 7/16"
Rough Opening 118" X 95 15/16"
**Operator Panels Ship Separate
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Left Center Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Center Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
Skid Plate Applied
*****Note: Unit Availability and Price is Subject to Change**

For product warranty information please visit, www.marvin.com/support/warranty

Line #8 Qty: 1	Mark Unit: 1st FL - Rear Foyer	Net Price: Ext. Net Price:	 USD	17,351.07 17,351.07

MARVIN

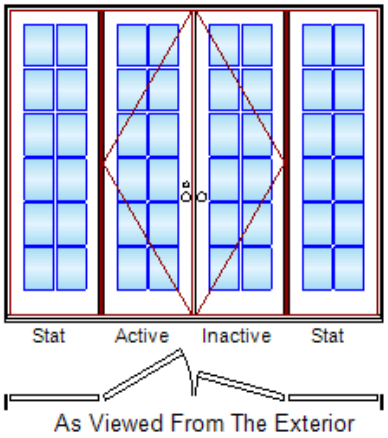

As Viewed From The Exterior

FS 117" X 95 7/16"
RO 118" X 95 15/16"
Egress Information
Width: 52 3/16" Height: 91 13/16"
Net Clear Opening: 33.28 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - OXXO Left Hand
Frame Size 117" X 95 7/16"
Rough Opening 118" X 95 15/16"
**Operator Panels Ship Separate
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Left Center Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Center Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation


For product warranty information please visit, www.marvin.com/support/warranty

GRT Enterprises - 17 Old Wood Main

Skid Plate Applied
***Note: Unit Availability and Price is Subject to Change**

Line #9 Qty: 1	Mark Unit: 1st FL - Great Room	Net Price: Ext. Net Price:	USD	14,185.79 14,185.79

MARVIN



As Viewed From The Exterior

FS 58 5/8" X 143 7/16"
RO 59 5/8" X 143 15/16"
Egress Information A1
No Egress Information available.
Egress Information B1
Width: 51 3/16" Height: 91 13/16"
Net Clear Opening: 32.64 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
1W2H - Rectangle Assembly
Assembly Rough Opening
59 5/8" X 143 15/16"
Prep for Field Mull Assembly
Mull Kit(s) Included
Sub Assembly 1 - 1W1H
Basic Frame 58 5/8" x 48"
Unit Locations: A1
Sub Assembly 2 - 1W1H
Basic Frame 58 5/8" x 95 7/16"
Unit Locations: B1

Unit: A1
Ultimate Inswing French Door Transom G2 - 6 9/16" OO
Basic Frame 58 5/8" X 48"
Rough Opening 59 5/8" X 48 1/2"
Extended Size Unit
Error: Ultimate In-sash transoms with more than one sash are not available factory mulled over doors with two operating panels.
Left Sash
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W3H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Right Sash
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W3H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile


Unit: B1
Ultimate Inswing French Door G2 6 9/16" - XX Left Hand
Basic Frame 58 5/8" X 95 7/16"
Rough Opening 59 5/8" X 95 15/16"
**Operator Panels Ship Separate
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel

For product warranty information please visit, www.marvin.com/support/warranty

Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
Mull 1 - Prep for Horizontal Standard Mull - 58 5/8" Long
Standard Mull Charge
6 9/16" Jambs
Thru Jamb Installation
Skid Plate Applied
*****Note: Unit Availability and Price is Subject to Change**
***Error: Pricing is not Valid

Line #10 Qty: 1	Mark Unit: 1st FL - Great Room	Net Price: Ext. Net Price:	USD	26,430.36 26,430.36

MARVIN

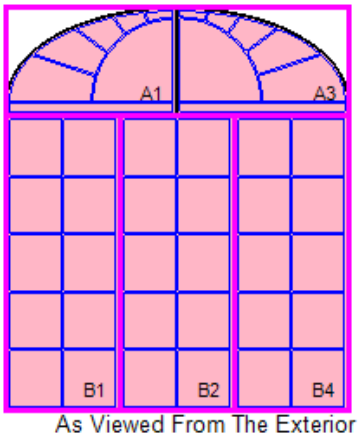

As Viewed From The Exterior

FS 156 5/8" X 180 1/8"
RO 157 5/8" X 180 5/8"
Egress Information A1, A3, B1, B2, B4
No Egress Information available.

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
4W2H - Shape by Units Assembly
Assembly Frame Size
156 5/8" X 180 1/8"
Assembly Rough Opening
157 5/8" X 180 5/8"
Error: Assembly exceeds size limitation. To confirm availability, alternative solutions, or pricing, submit an assistance request or speak with a Marvin representative.
Prep for Field Mull Assembly
Mull Kit(s) Included
Sub Assembly 1 - 2W1H
Basic Frame 156 5/8" x 48"
Unit Locations: A1,A3
Sub Assembly 2 - 1W1H
Basic Frame 52 3/16" x 132 1/8"
Unit Locations: B1
Sub Assembly 3 - 1W1H
Basic Frame 52 1/4" x 132 1/8"
Unit Locations: B2
Sub Assembly 4 - 1W1H
Basic Frame 52 3/16" x 132 1/8"
Unit Locations: B4

Unit: A1
Ultimate Direct Glaze Round Top - RT33
Basic Frame 77 13/16" X 48"
Basic Frame Springline from bottom: 6"
Rough Opening 78 13/16" X 48 1/2"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst

6 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int

Unit: A3
Ultimate Direct Glaze Round Top - RT34
Basic Frame 78 13/16" X 48"
Basic Frame Springline from bottom: 6"
Rough Opening 79 13/16" X 48 1/2"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst
6 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int

Unit: B1
Ultimate Direct Glaze Rectangle
Basic Frame 52 3/16" X 132 1/8"
Rough Opening 53 3/16" X 132 5/8"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Due to the inherent qualities of tempered glass, daylight gaps may be seen when using simulated divided lite bars. Daylight gaps could be visible between the internal spacer bar and surface applied bars when viewing from an acute angle to the glass.
Putty Exterior Glazing Profile

Unit: B2
Ultimate Direct Glaze Rectangle
Basic Frame 52 1/4" X 132 1/8"
Rough Opening 53 1/4" X 132 5/8"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Due to the inherent qualities of tempered glass, daylight gaps may be seen when using simulated divided lite bars. Daylight gaps could be visible between the internal spacer bar and surface applied bars when viewing from an acute angle to the glass.
Putty Exterior Glazing Profile

Unit: B4
Ultimate Direct Glaze Rectangle
Basic Frame 52 3/16" X 132 1/8"
Rough Opening 53 3/16" X 132 5/8"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Due to the inherent qualities of tempered glass, daylight gaps may be seen when using simulated divided lite bars. Daylight gaps could be visible between the internal spacer bar and surface applied bars when viewing from an acute angle to the glass.
Putty Exterior Glazing Profile
Horizontal Mulls Selected Per Unit
Mull 4 - Prep for Horizontal Standard Mull - 156 5/8" Long
Vertical Mulls Selected Per Unit
Mull 1 - Prep for Vertical Standard Mull - 132 1/8" Long
Mull 2 - Vertical Standard Mull - 48" Long
Mull 3 - Prep for Vertical Standard Mull - 132 1/8" Long
Standard Mull Charge
4 9/16" Jambs
No Installation Method


For product warranty information please visit, www.marvin.com/support/warranty

GRT Enterprises - 17 Old Wood Main

***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Non-Certified mull: check with local code officials for project specific requirements.
***Note: The minimum hub width is 12". This may affect the availability or appearance of this unit. Please contact your Marvin Representative for assistance.
***Note: UDG RT frames use different components than UDG RECT frames that cause the frame to daylight conversion to be different.
*****Note: Unit Availability and Price is Subject to Change**
***Error: Pricing is not Valid

Line #11 Qty: 1	Mark Unit: 1st FL - Great Room	Net Price: Ext. Net Price:	USD	14,185.79 14,185.79

MARVIN



As Viewed From The Exterior

FS 58 5/8" X 143 7/16"
RO 59 5/8" X 143 15/16"
Egress Information A1
No Egress Information available.
Egress Information B1
Width: 51 3/16" Height: 91 13/16"
Net Clear Opening: 32.64 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
1W2H - Rectangle Assembly
Assembly Rough Opening
59 5/8" X 143 15/16"
Prep for Field Mull Assembly
Mull Kit(s) Included
Sub Assembly 1 - 1W1H
Basic Frame 58 5/8" x 48"
Unit Locations: A1
Sub Assembly 2 - 1W1H
Basic Frame 58 5/8" x 95 7/16"
Unit Locations: B1

Unit: A1
Ultimate Inswing French Door Transom G2 - 6 9/16" OO
Basic Frame 58 5/8" X 48"
Rough Opening 59 5/8" X 48 1/2"
Extended Size Unit
Error: Ultimate In-sash transoms with more than one sash are not available factory mulled over doors with two operating panels.
Left Sash
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W3H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Right Sash
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W3H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile


Unit: B1
Ultimate Inswing French Door G2 6 9/16" - XX Right Hand
Basic Frame 58 5/8" X 95 7/16"
Rough Opening 59 5/8" X 95 15/16"
**Operator Panels Ship Separate
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG

For product warranty information please visit, www.marvin.com/support/warranty

Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
Mull 1 - Prep for Horizontal Standard Mull - 58 5/8" Long
Standard Mull Charge
6 9/16" Jambs
Thru Jamb Installation
Skid Plate Applied
*****Note: Unit Availability and Price is Subject to Change**
***Error: Pricing is not Valid

Line #12 Qty: 1	Mark Unit: 1st FL - Rear Bar	Net Price: Ext. Net Price:	USD	8,871.00 8,871.00

MARVIN



As Viewed From The Exterior

FS 58 5/8" X 80 7/16"
RO 59 5/8" X 80 15/16"
Egress Information
Width: 51 3/16" Height: 76 13/16"
Net Clear Opening: 27.31 SqFt


Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - XX Left Hand
Frame Size 58 5/8" X 80 7/16"
Rough Opening 59 5/8" X 80 15/16"
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int

GRT Enterprises - 17 Old Wood Main

Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
***Note: Unit Availability and Price is Subject to Change**

Line #13 Qty: 1	Mark Unit: 1st FL - Kitchen	Net Price: Ext. Net Price:	USD	13,948.23 13,948.23

MARVIN

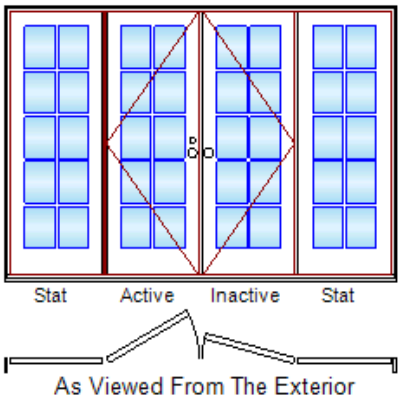

FS 117" X 80 7/16"
RO 118" X 80 15/16"
Egress Information
Width: 52 3/16" Height: 76 13/16"
Net Clear Opening: 27.84 SqFt


Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - OXXO Left Hand
Frame Size 117" X 80 7/16"
Rough Opening 118" X 80 15/16"
**Operator Panels Ship Separate
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Left Center Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Center Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon

For product warranty information please visit, www.marvin.com/support/warranty

Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
Skid Plate Applied
*****Note: Unit Availability and Price is Subject to Change**

Line #14 Qty: 1	Mark Unit: 1st FL - Kitchen	Net Price: Ext. Net Price:	USD	2,900.46 2,900.46

MARVIN



As Viewed From The Exterior

FS 72" X 48"
IO 72 3/8" X 48 1/4"
Egress Information A1, A3
Width: 15 15/64" Height: 43 19/32"
Net Clear Opening: 4.61 SqFt
Egress Information A2
No Egress Information available.

Pebble Gray Exterior
Bare Pine Interior
3W1H - Rectangle Assembly
Assembly Frame Size
72" X 48"
Assembly Inside Opening
72 3/8" X 48 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 48"
Inside Opening 24 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W3H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.


Unit: A2
Elevate Casement Narrow Frame - Stationary
Basic Frame 24" X 48"
Inside Opening 24 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W3H
Pebble Gray Ext - Bare Int

Unit: A3

Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 48"
Inside Opening 24 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W3H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #15 Qty: 1	Mark Unit: 1st FL - Rear Maid's Hallway	Net Price: Ext. Net Price:	 USD	4,151.85 4,151.85

MARVIN




FS 29 1/2" X 80 7/16"
RO 30 1/2" X 80 15/16"
Egress Information
Width: 24 1/8" Height: 76 13/16"
Net Clear Opening: 12.87 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - X Right Hand
Frame Size 29 1/2" X 80 7/16"
Rough Opening 30 1/2" X 80 15/16"
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Goldtone Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
*****Note: Unit Availability and Price is Subject to Change**

Line #16 Qty: 1	Mark Unit: 1st FL - Rear Bath	Net Price: Ext. Net Price:	 USD	1,422.84 1,422.84

MARVIN

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Right Hand
Frame Size 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior




As Viewed From The Exterior

FS 24" X 60"
IO 24 3/8" X 60 1/4"
Egress Information
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

IG
Tempered Low E2 Obscure w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #17 Qty: 1	Mark Unit: 1st FL - Maid's Bath	Net Price: Ext. Net Price:	USD	1,422.84 1,422.84

MARVIN



As Viewed From The Exterior


FS 24" X 60"
IO 24 3/8" X 60 1/4"
Egress Information
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Left Hand
Frame Size 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 Obscure w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #18 Qty: 1	Mark Unit: 1st FL - Maid's Quarters	Net Price: Ext. Net Price:	USD	1,191.04 1,191.04

MARVIN

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Left Hand
Frame Size 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon




As Viewed From The Exterior

FS 24" X 60"
IO 24 3/8" X 60 1/4"
Egress Information
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #19 Qty: 1	Mark Unit: 1st FL - Maid's Quarters	Net Price: Ext. Net Price:	USD	2,614.72 2,614.72

MARVIN



As Viewed From The Exterior

FS 48" X 71 1/8"
IO 48 3/8" X 71 3/8"
Egress Information A1, A2
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 71 1/8"
Assembly Inside Opening
48 3/8" X 71 3/8"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle

Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #20	Mark Unit: 1st FL - Maid's Hallway	Net Price:		4,021.56
Qty: 1		Ext. Net Price:	USD	4,021.56

MARVIN




As Viewed From The Exterior

CN 3068
FS 37 7/16" X 82"
RO 38 7/16" X 82 1/2"
Egress Information
Width: 32 1/16" Height: 78 3/8"
Net Clear Opening: 17.46 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - X Left Hand
CN 3068
Rough Opening 38 7/16" X 82 1/2"
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Standard Cut 3W5H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
*****Note: Unit Availability and Price is Subject to Change**

Line #21	Mark Unit: 1st FL - Laundry	Net Price:		1,307.36
Qty: 1		Ext. Net Price:	USD	1,307.36

MARVIN



As Viewed From The Exterior

FS 24" X 71 1/8"

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Left Hand
Frame Size 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs


GRT Enterprises - 17 Old Wood Main

IO 24 3/8" X 71 3/8"
Egress Information
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #22 Qty: 2	Mark Unit: 1st FL - Garage	Net Price: Ext. Net Price:	USD	2,614.72 5,229.44

MARVIN

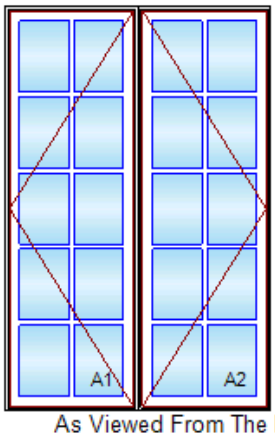

As Viewed From The Exterior

FS 48" X 71 1/8"
IO 48 3/8" X 71 3/8"
Egress Information A1, A2
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 71 1/8"
Assembly Inside Opening
48 3/8" X 71 3/8"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.


Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #23 Qty: 2	Mark Unit: 1st FL - Guest Bed	Net Price: Ext. Net Price:	USD	2,614.72 5,229.44

MARVIN

Pebble Gray Exterior
Bare Pine Interior

For product warranty information please visit, www.marvin.com/support/warranty



As Viewed From The Exterior

FS 48" X 71 1/8"
IO 48 3/8" X 71 3/8"
Egress Information A1, A2
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

2W1H - Rectangle Assembly
Assembly Frame Size
48" X 71 1/8"
Assembly Inside Opening
48 3/8" X 71 3/8"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #24 Qty: 1	Mark Unit: 1st FL - Guest Bath	Net Price: Ext. Net Price:	USD	1,307.36 1,307.36

MARVIN

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Left Hand
Frame Size 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen




As Viewed From The Exterior

FS 24" X 71 1/8"
IO 24 3/8" X 71 3/8"
Egress Information
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #25 Qty: 2	Mark Unit: 1st FL - Dinning	Net Price: Ext. Net Price:	USD	2,614.72 5,229.44

MARVIN



As Viewed From The Exterior

FS 48" X 71 1/8"
IO 48 3/8" X 71 3/8"
Egress Information A1, A2
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 71 1/8"
Assembly Inside Opening
48 3/8" X 71 3/8"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle

Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #26 Qty: 1	Mark Unit: 1st FL - Front Powder	Net Price: Ext. Net Price:	USD	1,307.36 1,307.36

MARVIN




As Viewed From The Exterior

FS 24" X 71 1/8"
IO 24 3/8" X 71 3/8"
Egress Information
Width: 15 15/64" Height: 66 23/32"
Net Clear Opening: 7.06 SqFt

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Right Hand
Frame Size 24" X 71 1/8"
Inside Opening 24 3/8" X 71 3/8"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W5H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #27 Qty: 1	Mark Unit: 2nd FL - Master Bath	Net Price: Ext. Net Price:	USD	2,559.10 2,559.10

MARVIN



As Viewed From The Exterior

FS 72" X 48"
IO 72 3/8" X 48 1/4"
Egress Information A1
Width: 15 15/64" Height: 43 19/32"
Net Clear Opening: 4.61 SqFt
Egress Information A2
No Egress Information available.

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
72" X 48"
Assembly Inside Opening
72 3/8" X 48 1/4"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 48"
Inside Opening 24 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W3H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen

Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame Picture
Basic Frame 48" X 48"
Inside Opening 48 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 3W3H
Pebble Gray Ext - Bare Int
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #28 Qty: 1	Mark Unit: 2nd FL - Master Bath	Net Price: Ext. Net Price:	USD	2,559.10 2,559.10

MARVIN



As Viewed From The Exterior

FS 72" X 48"
IO 72 3/8" X 48 1/4"
Egress Information A1
No Egress Information available.
Egress Information A2
Width: 15 15/64" Height: 43 19/32"
Net Clear Opening: 4.61 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
72" X 48"
Assembly Inside Opening
72 3/8" X 48 1/4"


Unit: A1
Elevate Casement Narrow Frame Picture
Basic Frame 48" X 48"
Inside Opening 48 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 3W3H
Pebble Gray Ext - Bare Int

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 48"
Inside Opening 24 3/8" X 48 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W3H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs

Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #29 Qty: 1	Mark Unit: 2nd FL - Master Bath	Net Price: Ext. Net Price:	USD	2,726.00 2,726.00

MARVIN



As Viewed From The Exterior

FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #30 Qty: 1	Mark Unit: 2nd FL - Master Bed Hallway	Net Price: Ext. Net Price:	USD	1,191.04 1,191.04

MARVIN

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Left Hand




As Viewed From The Exterior

FS 24" X 60"
IO 24 3/8" X 60 1/4"
Egress Information
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Frame Size 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

Line #31 Qty: 1	Mark Unit: 2nd FL - Master Sleeping	Net Price: Ext. Net Price:	USD	10,187.28 10,187.28

MARVIN



As Viewed From The Exterior


FS 58 5/8" X 95 7/16"
RO 59 5/8" X 95 15/16"
Egress Information
Width: 51 3/16" Height: 91 13/16"
Net Clear Opening: 32.64 SqFt

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - XX Right Hand
Frame Size 58 5/8" X 95 7/16"
Rough Opening 59 5/8" X 95 15/16"
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Traditional Lever(s)
Multi-Point Lock on Active Panel
Brass PVD Active Exterior Handle Set on Active Panel Keyed
Brass PVD Active Interior Handle Set on Active Panel
Keyed
Multi-Point Lock on Inactive Panel
Brass PVD Inactive Exterior Handle Set on Inactive Panel
Brass PVD Inactive Interior Handle Set on Inactive Panel
Brass PVD Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs

Thru Jamb Installation
***Note: Unit Availability and Price is Subject to Change

Line #32	Mark Unit: 2nd FL - Master Sleeping	Net Price:		1,975.76
Qty: 2		Ext. Net Price:	USD	3,951.52

MARVIN




As Viewed From The Exterior

FS 24" X 72"
IO 24 3/8" X 72 1/4"
Egress Information
No Egress Information available.

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Casement Narrow Frame Picture
Frame Size 24" X 72"
Inside Opening 24 3/8" X 72 1/4"
0 Degree Frame Bevel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG - 3/4"
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W5H
Pebble Gray Clad Ext - Primed Pine Int
Beige Weather Strip
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Solid Wood Covers
2 3/16" Jambs
No Installation Method
***Note: Frame Size shown is measured from the exterior of the unit.
***Note: The overall frame depth will be 1 1/16" larger than the jamb size shown above. For example, a 3 1/4" overall frame depth will have a 2 3/16" jamb.
***Note: Unit Availability and Price is Subject to Change

Line #33	Mark Unit: 2nd FL - Master Sleeping	Net Price:		3,697.13
Qty: 1		Ext. Net Price:	USD	3,697.13

MARVIN

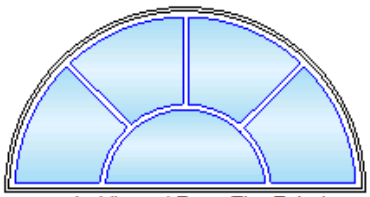

As Viewed From The Exterior


FS 58 5/8" X 29 5/16"
RO 59 5/8" X 29 13/16"
Egress Information
No Egress Information available.

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 Direct Glaze Round Top - RT1
Basic Frame 58 5/8" X 29 5/16"
Rough Opening 59 5/8" X 29 13/16"
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst
5 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int
4 9/16" Jambs
No Installation Method
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: The minimum hub width is 12". This may affect the availability or appearance of this unit. Please contact your Marvin Representative for assistance.
***Note: Unit Availability and Price is Subject to Change

Line #34	Mark Unit: 2nd FL - Master WIC	Net Price:		2,382.08
Qty: 1		Ext. Net Price:	USD	2,382.08

MARVIN

Pebble Gray Exterior
Bare Pine Interior



As Viewed From The Exterior

FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #35 Qty: 1	Mark Unit: 2nd FL - Master Sitting	Net Price: Ext. Net Price:	 USD	2,382.08 2,382.08


MARVIN

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG

For product warranty information please visit, www.marvin.com/support/warranty

GRT Enterprises - 17 Old Wood Main



As Viewed From The Exterior


FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #36 Qty: 1	Mark Unit: 2nd FL - Front Center Hall	Net Price: Ext. Net Price:	USD	8,119.32 8,119.32

MARVIN



As Viewed From The Exterior

FS 72" X 120"
RO 73" X 120 1/2"
Egress Information A1, B1
No Egress Information available.

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
1W2H - Shape by Units Assembly
Assembly Rough Opening
73" X 120 1/2"

Unit: A1
Ultimate Direct Glaze Round Top - RT1
Basic Frame 72" X 36"
Rough Opening 73" X 36 1/2"
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
1 1/8" SDL - With Spacer Bar - Black
Sunburst
5 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int


Unit: B1
Ultimate Direct Glaze Rectangle
Basic Frame 72" X 84"
Rough Opening 73" X 84 1/2"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 5W4H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile

For product warranty information please visit, www.marvin.com/support/warranty

Standard Mull Charge
4 9/16" Jambs
No Installation Method
***Note: The minimum hub width is 12". This may affect the availability or appearance of this unit. Please contact your Marvin Representative for assistance.
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: UDG RT frames use different components than UDG RECT frames that cause the frame to daylight conversion to be different.
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
*****Note: Unit Availability and Price is Subject to Change**

Line #37 Qty: 2	Mark Unit: 2nd FL - Daughter's Bed	Net Price: Ext. Net Price:	USD	2,726.00 5,452.00

MARVIN

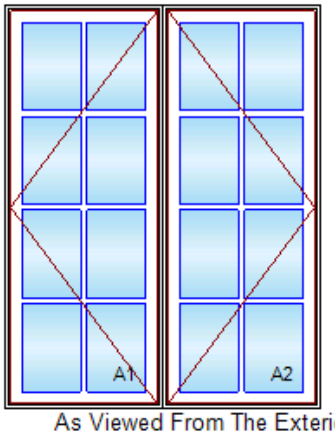

As Viewed From The Exterior

FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation

***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #38 Qty: 1	Mark Unit: 2nd FL - Daughter's Bed	Net Price: Ext. Net Price:	 USD	2,382.08 2,382.08

MARVIN



As Viewed From The Exterior

FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"


Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #39 Qty: 1	Mark Unit: 2nd FL - Daughter's Bath	Net Price: Ext. Net Price:	 USD	2,726.00 2,726.00

MARVIN

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size



As Viewed From The Exterior

FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**


Line #40 Qty: 1	Mark Unit: 2nd FL - Daniel's Sitting	Net Price: Ext. Net Price:	USD	2,382.08 2,382.08

MARVIN

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar

For product warranty information please visit, www.marvin.com/support/warranty



As Viewed From The Exterior


FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #41 Qty: 1	Mark Unit: 2nd FL - Daniel's Bath	Net Price: Ext. Net Price:	USD	2,726.00 2,726.00

MARVIN



As Viewed From The Exterior

FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.


Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"

For product warranty information please visit, www.marvin.com/support/warranty

0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #42	Mark Unit: 2nd FL - Daniel's Bed	Net Price:		8,044.87
Qty: 1		Ext. Net Price:	USD	8,044.87

MARVIN



As Viewed From The Exterior

FS 48" X 108"
RO 49" X 108 1/2"
Egress Information
No Egress Information available.


Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Direct Glaze Round Top - RT2
Frame Size 48" X 108"
Unit Is Not WDMA Certified
Frame Size Springline from bottom: 84"
Rough Opening 49" X 108 1/2"
Rough Opening Springline from bottom: 84"
IG
1/4" Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst With Rectangular 4W5H
20 Rect Lites
5 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int
Due to the inherent qualities of tempered glass, daylight gaps may be seen when using simulated divided lite bars. Daylight gaps could be visible between the internal spacer bar and surface applied bars when viewing from an acute angle to the glass.
4 9/16" Jambs
No Installation Method
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #44	Mark Unit: 2nd FL - Daniel's Bed	Net Price:		2,382.08
Qty: 1		Ext. Net Price:	USD	2,382.08

MARVIN

Pebble Gray Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Frame Size
48" X 60"
Assembly Inside Opening
48 3/8" X 60 1/4"

Unit: A1
Elevate Casement Narrow Frame - Left Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel



As Viewed From The Exterior


FS 48" X 60"
IO 48 3/8" X 60 1/4"
Egress Information A1, A2
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.

Unit: A2
Elevate Casement Narrow Frame - Right Hand
Basic Frame 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
*****Note: Unit Availability and Price is Subject to Change**

Line #45 Qty: 1	Mark Unit: 2nd FL - Rear Center Hall	Net Price: Ext. Net Price:	USD	3,700.68 3,700.68

MARVIN

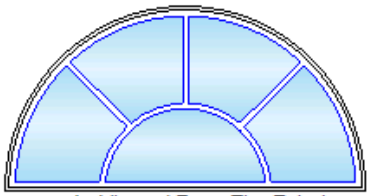
As Viewed From The Exterior


FS 58 3/4" X 29 3/8"
RO 59 3/4" X 29 7/8"
Egress Information
No Egress Information available.

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 Direct Glaze Round Top - RT1
Basic Frame 58 3/4" X 29 3/8"
Rough Opening 59 3/4" X 29 7/8"
IG
Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Sunburst
5 Radius Lites
Pebble Gray Clad Ext - Primed Pine Int
4 9/16" Jambs
No Installation Method
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: The minimum hub width is 12". This may affect the availability or appearance of this unit. Please contact your Marvin Representative for assistance.
*****Note: Unit Availability and Price is Subject to Change**

Line #46 Qty: 1	Mark Unit: 2nd FL - Rear Center Hall	Net Price: Ext. Net Price:	USD	7,048.57 7,048.57

GRT Enterprises - 17 Old Wood Main

MARVIN




As Viewed From The Exterior

FS 58 3/4" X 95 7/16"
RO 59 3/4" X 95 15/16"
Egress Information
No Egress Information available.

Pebble Gray Clad Exterior
Primed Pine Interior
Back Prime
Ultimate Inswing French Door G2 4 9/16" - OO
Frame Size 58 3/4" X 95 7/16"
Rough Opening 59 3/4" X 95 15/16"
Left Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Pebble Gray Clad Sash Exterior
Primed Pine Sash Interior
IG
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W6H
Pebble Gray Clad Ext - Primed Pine Int
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Ebony Performance Sill
Black Weather Strip
4 9/16" Jambs
Thru Jamb Installation
*****Note: Unit Availability and Price is Subject to Change**

Line #47 Qty: 2	Mark Unit: 2nd FL - Main Stair	Net Price: Ext. Net Price:	USD	1,363.00 2,726.00

MARVIN



As Viewed From The Exterior

FS 24" X 60"
IO 24 3/8" X 60 1/4"
Egress Information
Width: 15 15/64" Height: 55 19/32"
Net Clear Opening: 5.89 SqFt

Pebble Gray Exterior
Bare Pine Interior
Elevate Casement Narrow Frame - Left Hand
Frame Size 24" X 60"
Inside Opening 24 3/8" X 60 1/4"
0 Degree Frame Bevel
Pebble Gray Exterior
Bare Pine Interior
IG
Tempered Low E2 w/Argon
Silver Stainless Steel Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Silver
Rectangular - Special Cut 2W4H
Pebble Gray Ext - Bare Int
Brass Folding Handle
Interior Aluminum Screen
Bright View Mesh
Bare Wood Veneer Surround
Aluminum Screen with Bare Wood Veneer will not be prefinished to match the unit's Interior Finish. Customer responsible for finishing.
3 1/4" Jambs
Thru Jamb Installation
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.
***Note: Frame Size shown is measured from the exterior of the unit.
*****Note: Unit Availability and Price is Subject to Change**

GRT Enterprises - 17 Old Wood Main

Project Subtotal Net Price: USD	296,416.58
3.312% Sales Tax: USD	9,817.32
Project Total Net Price: USD	306,233.90

U Lines with Errors Exist on Project - Project Pricing is not Valid

GRT Enterprises - 17 Old Wood Main

TERMS AND CONDITIONS

It is the responsibility of the purchaser to ensure all measurements, colors, specifications, hardware, etc. are correct. Prior to Kuiken Brothers placing the order, a signature along with a 50% deposit will be required. Cancelled or change request once the order has been submitted will incur additional fees. Units may not be returned for credit. Once received by Kuiken Brothers, windows stored for more than 2 weeks will incur a storage fee.

PURCHASE APPROVAL/SIGN OFF

Project Subtotal Net Price: USD 296,416.58
3.312% Sales Tax: USD 9,817.32
Project Total Net Price: USD 306,233.90
U Lines with Errors Exist on Project - Project Pricing is not Valid

I have reviewed all line item quotes in detail and agree that the product specifications and pricing are accurate, and I approve the project for order. I acknowledge that additional charges, tax or Terms and Conditions may apply.

Seller: _____

Buyer: _____